


Additional Hardware Options

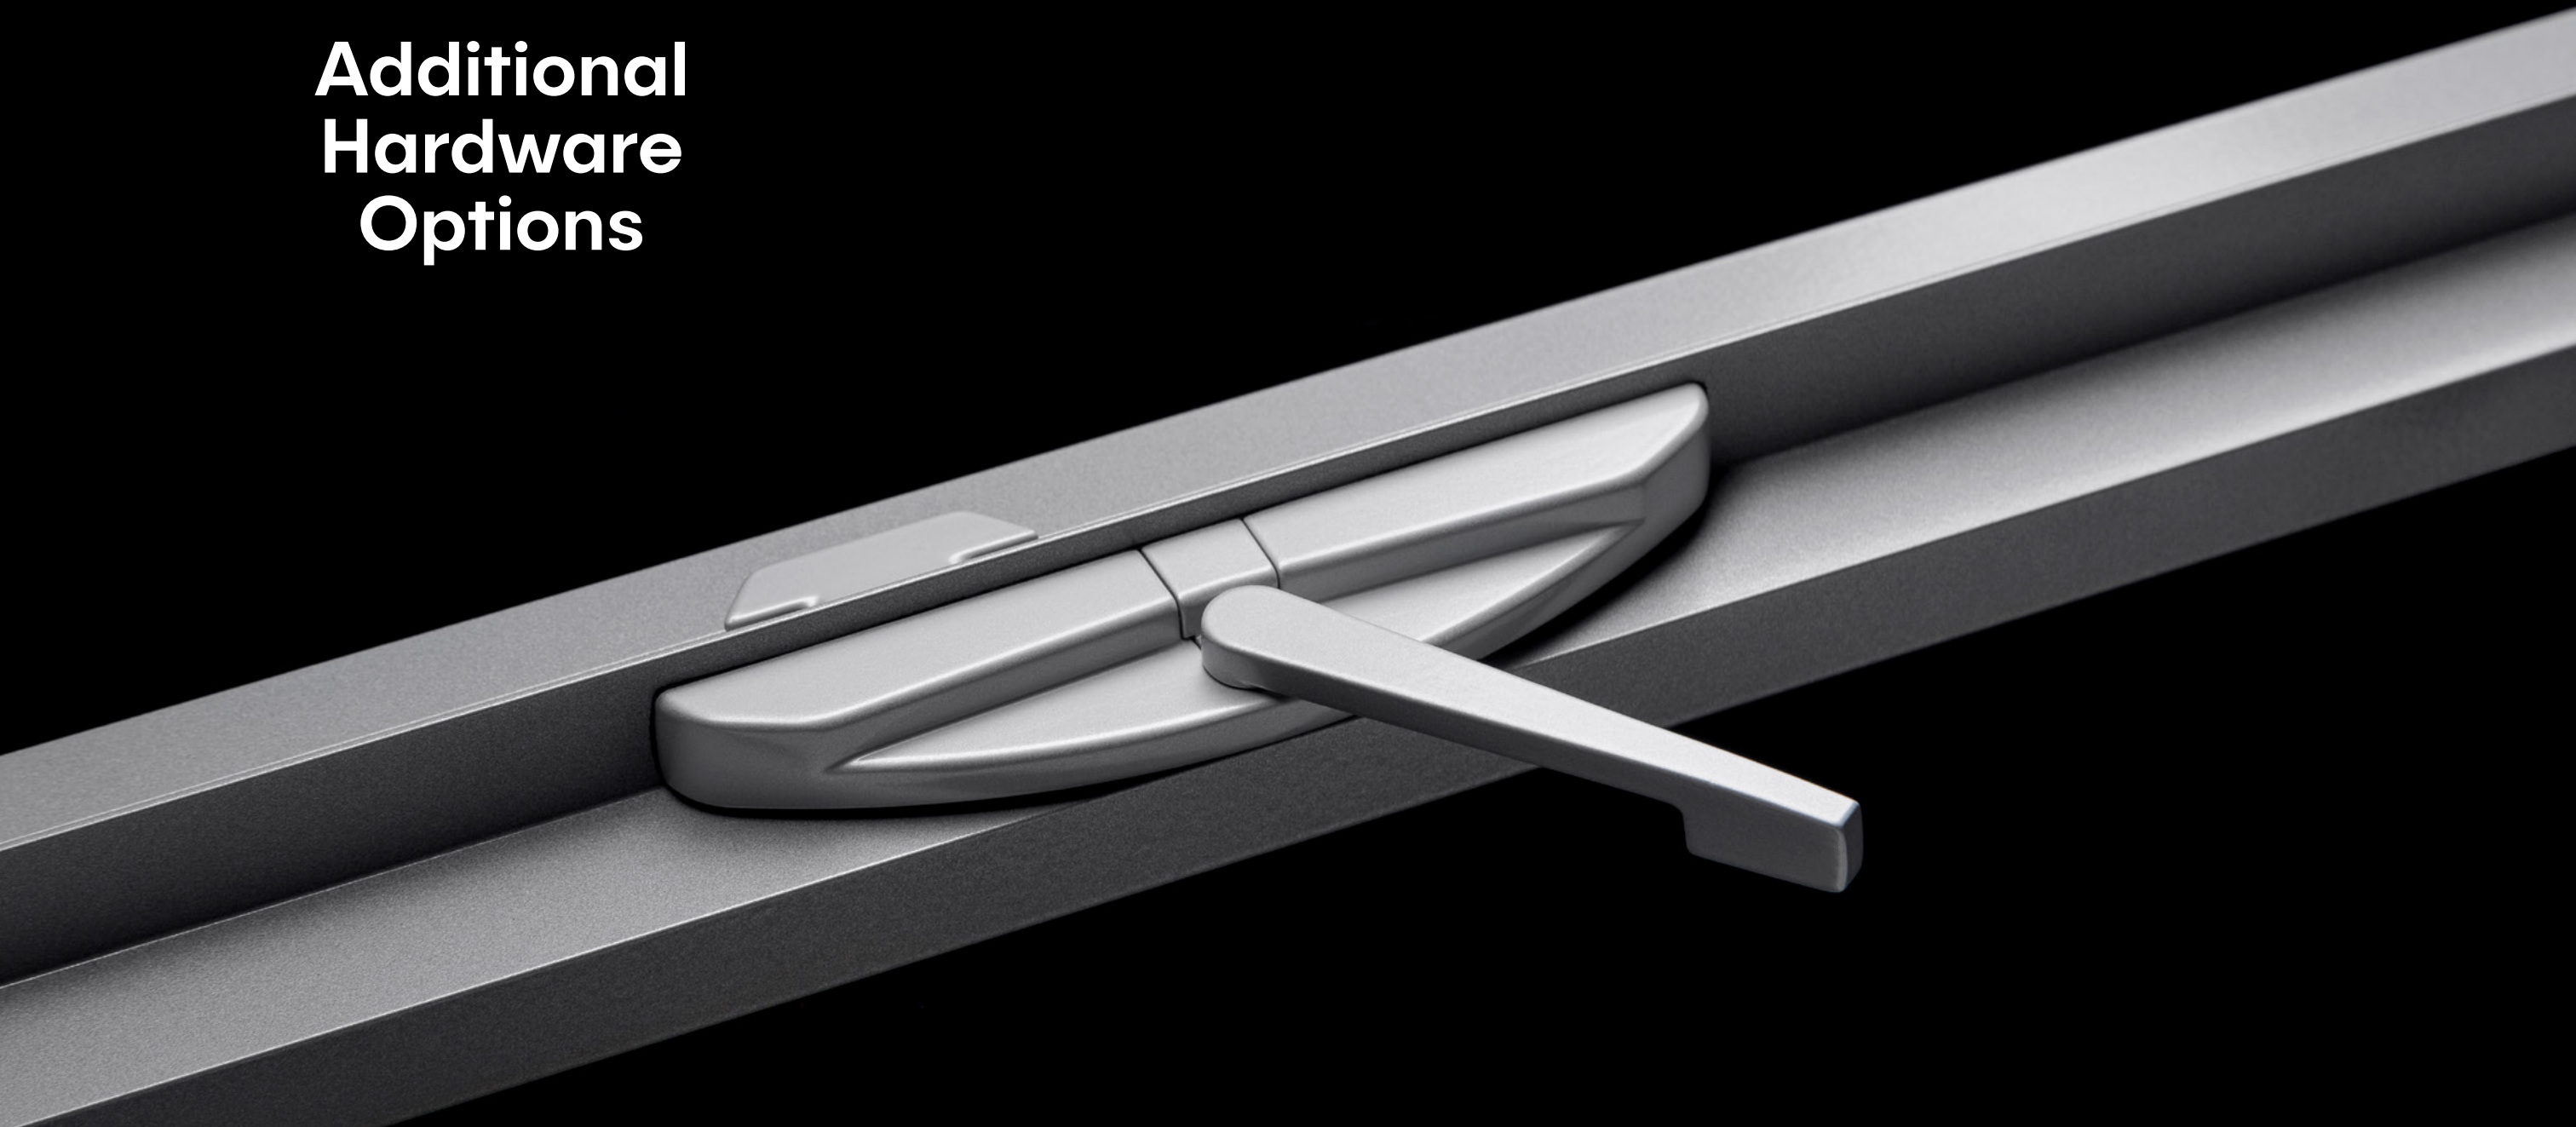


Truth™ Awning Winder

Truth™ compact awning scissor winders are perfect for large awning windows. Tried and tested, Truth™ winders are strong and won't budge under wind load.

Available in a selected range of colours, off-white, black and silver.

Suitable for use with:

- 616 MAGNUM™ Awning/Casement Window
- 467 Architectural Awning/Casement Window
- 468 Truth™ Awning Window/Casement
- 668 Truth™ Awning Window/Casement
- 726 Thermally Broken Awning/Casement Window





Winder (pictured)
Part 93781

- Height 34mm
- Width 135mm
- Depth 40mm

Winder (keyed)
Part 93529

- Height 34mm
- Width 170mm
- Depth 37mm

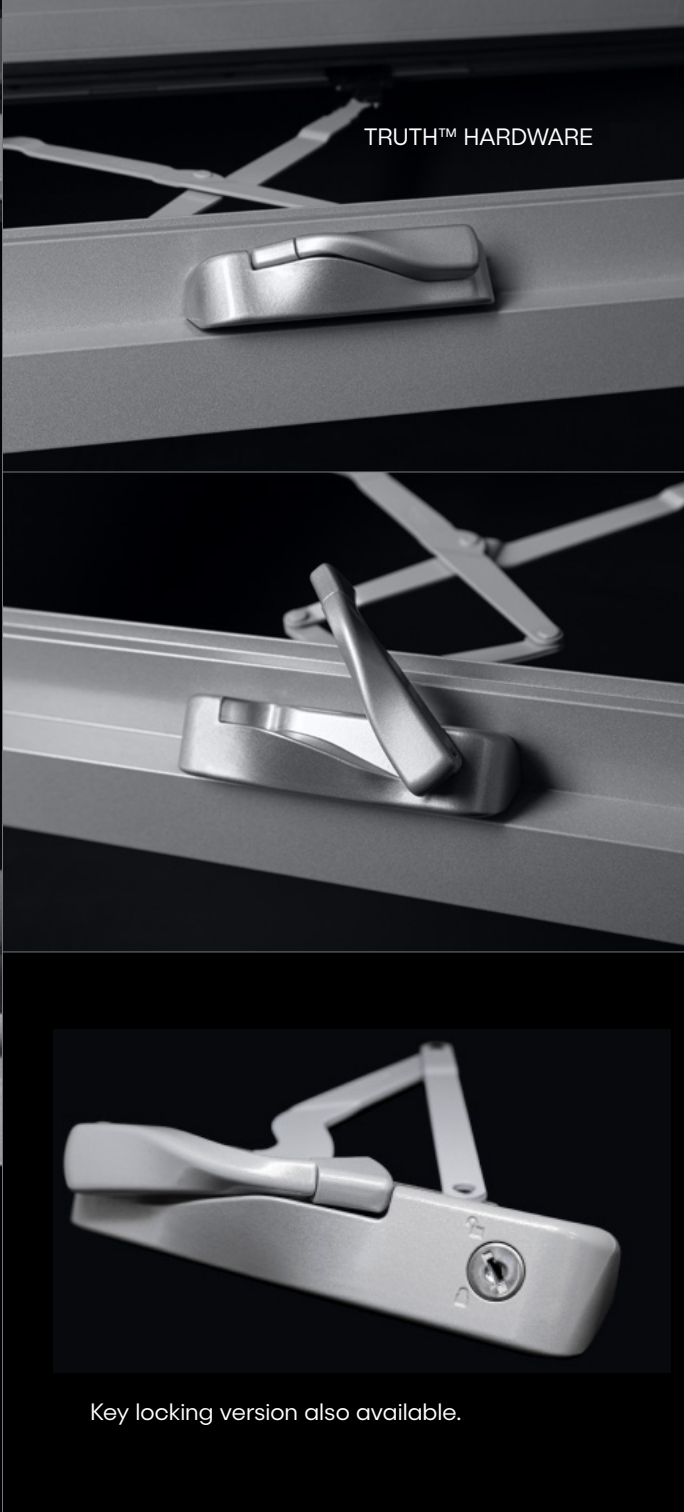

Key locking version also available.


Truth™ Casement Winder

The Truth™ Casement Winder is a compact and stylish scissor winder ideal for large casement windows and offers 90-degree opening. This winder has been rigorously tested and won't open or close under wind load.

Available in off-white, black and silver.

Suitable for use with:

- 616 MAGNUM™ Awning/Casement Window
- 467 Architectural Awning/Casement Window
- 468 Truth™ Awning Window/Casement
- 668 Truth™ Awning Window/Casement
- 726 Thermally Broken Awning/Casement Window



- Winder (pictured)
Height 34mm
Width 135mm
Depth 40mm
- Winder (keyed)
Height 34mm
Width 170mm
Depth 37mm
- RH Part 93784
LH Part 93783



Key locking version also available.





Colour Matched



BAL-40 Tested

Meeting Stile Mortice Lock


Designed exclusively for use with the Elevate™ range of SlideMASTER™ flush finish doors, the Meeting Stile Mortice Lock integrates neatly into a central panel to be fully concealed for maximum glass sight lines.

The simple operating method provides ease of use and multi-point locking for excellent security.

Available in a range of powder coat finishes to ensure the lock can be colour matched for a truly discreet appearance.

Exclusively used with:

- 758** High Performance Sliding Door
- 759** ComfortEDGE™ Sliding Door
- 704FBR** SlideMASTER™ Sliding Door (Flush Bottom Rolling)
- 704FTH** SlideMASTER™ Sliding Door (Flush Top Hung)



Height 250mm
Width 33mm
Depth 6.5mm
Part 93796





Colour Matched



BAL-40 Tested

Flush Stile Pull Handle


Architecturally inspired, the Flush Stile Pull Handle is designed exclusively for use with the Elevate range of SlideMASTER™ flush finish doors.

The colour matched, aluminium pull handle provides a strong D-Pull grip which nests neatly around the panel for a minimal and integrated appearance.


Exclusively used with:

704FBR SlideMASTER™ Sliding Door (Flush Bottom Rolling)

704FTH SlideMASTER™ Sliding Door (Flush Top Hung)



Height 300mm
Width 60.5mm
Depth 40mm
Part 93799

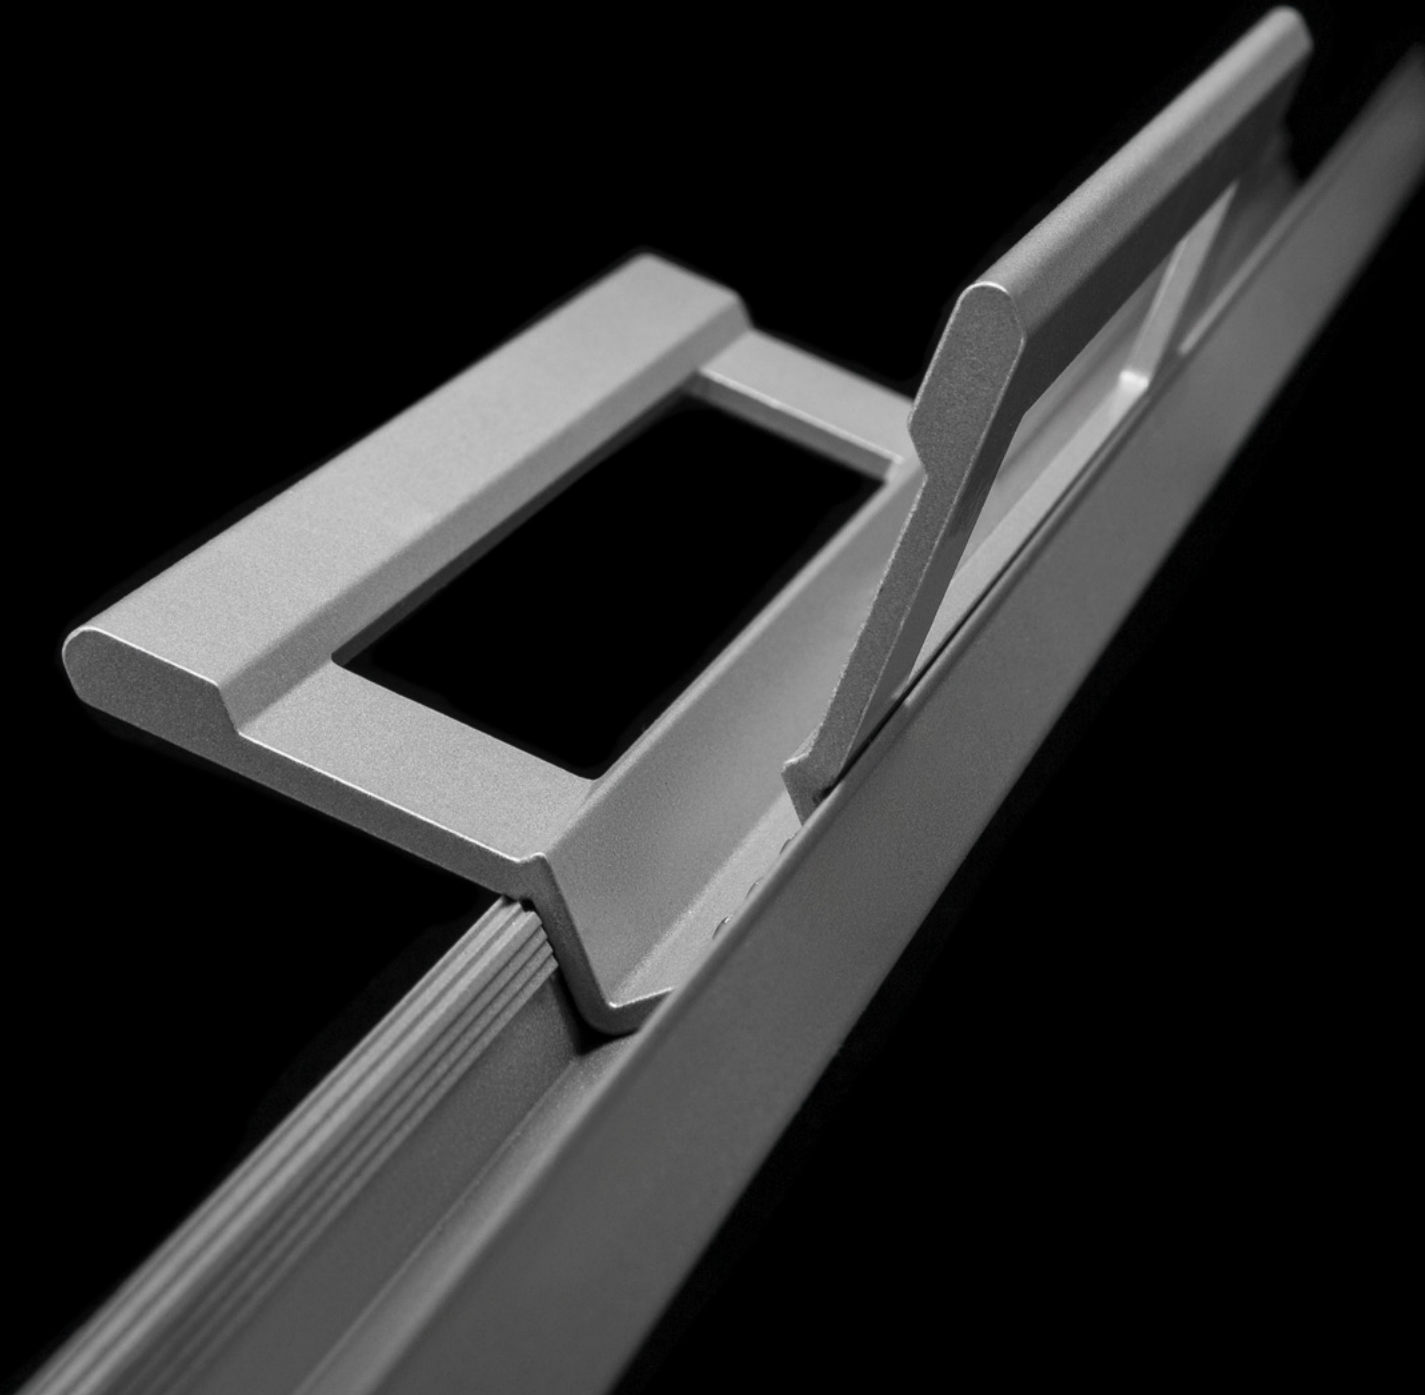

Lift Slide Handle


Designed exclusively for use with the Elevate™ SlideMASTER™ Lift Slide Door, the handle utilises a 180° operating arc to activate lift mechanisms within the sliding door panel for effortless operation. Reverse rotation compresses the panel against the door seals for security and airtightness.

The clean, sharp styling of the handle allows it to integrate with the ICON™ hardware range when coordinating the hardware selection for your home.

Available in black, white and brushed silver.

Exclusively used with:

704LS SlideMASTER™ Sliding Door (Lift Slide)



Handle	253mm
Height	160mm
Width	34mm
Depth	71mm
Part	93534



Shown in brushed silver.

Performance Side Latch

Used in conjunction with the single or twin manual chainwinders, performance latches add additional locking points for awning windows.

They may be recommended by your fabricator for applications subjected to high wind loads or in situations where awning windows are wide and require additional locking points to provide security and integrity.

Suitable for use with:

- 516

Residential Awning Window (50mm)
- 517

Residential Awning Window (102mm)
- 756

High Performance Awning Window
- 616

MAGNUM™ Awning Window
- 456

Commercial Awning Window
- 665


Commercial Awning Window
- 466

Architectural Awning Window
- 726

Thermally Broken Casement Window
- 804

Thermally Broken Casement Window
- 824

Thermally Broken Casement Window



Height 157.5mm
Width 32mm
Depth 16mm
Part 93112



Sliding Window Handle Lock

A reliable classic, the Sliding Window Handle Lock is designed with curved lines for comfort and ease.


Available in black only.

Suitable for use with:


- 752

High Performance Sliding Window
- 753

ComfortEDGE™ Sliding Window

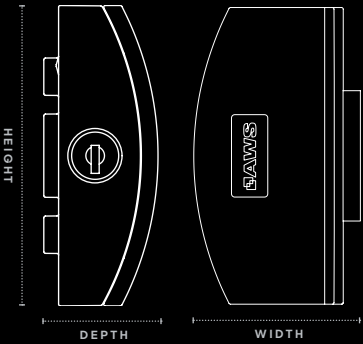

Height 90mm
Width 51mm
Depth 30mm
Part 94614



ANDO™

	50/52	442	452	453	456	461	471	642	665	804	831	832	852	824	826
Single Point Sliding Door Lock		●					●	●							
Twin Point Sliding Door Lock		●					●	●							
Slimline Sliding Door Lock		●					●	●							
Sliding Door Handle	●													●	
Hinged Door Lock (2-point)	●										●	●	●		
Hinged Door Lock (4-point)	●										●	●	●		
Lever Compression Lock	●										●	●	●		
Bi-fold Operator											●	●			
Extruded Pull Handle															
Sliding Window Lock						●									
Double Hung Lock				●											
Recessed Finger Pull															
Manual Chainwinder					●				●						
Twin Chainwinder					●				●						

ICON™

Sliding Door Handle	●												●		
Hinged Door Lock (2-point)	●										●	●	●		
Hinged Door Lock (4-point)	●										●	●	●		
Lever Compression Lock	●										●	●	●		
Bi-fold Operator											●	●			
Casement Latch					●										
Recessed Flush Pull													●		
Sliding Window Lock						●									
ISEO Mortice Lock															

MIRO™


D-Pull Sliding Door Handle	●												●		
Single Point Sliding Door Lock		●					●	●							
Hinged Door Lock	●										●	●	●		
Lever Compression Lock	●										●	●	●		
Bi-fold Operator											●	●			
Recessed Flush Pull													●		
Single Chainwinder					●				●						
Twin Chainwinder					●				●						
Sliding Window Lock						●									

Truth™ Winder									●					●	●
Truth™ Casement Winder															
Meeting Stile Mortice Lock															
Flush Pull Handle															
Lift Slide Handle															
Performance Side Latch					●				●		●			●	
Sliding Window Handle Lock															

Colour

ANDO™ hardware is available colour matched to a range of powder coat colours.


Standard Colours




Pearl White
GLOSS 1004




APO Grey
SATIN 1001



Dune®
MATT 1010




Citi
PEARL MATT 4026




Magnolia
GLOSS 2012



Pottery
SATIN 2017



Custom Black
MATT 1002



Monument®
MATT 1011



Woodland Grey®
MATT 1008




Silver Medallist
PEARL SATIN 4028




Stone Beige
MATT 2031




Dark Grey
MATT 2005



Surfmist®
MATT 1013




Primrose
GLOSS 1005




Paperbark®
MATT 1012



Precious Silver Pearl
PEARL SATIN 4030



Hammersley Brown
SATIN 2008



Silver Grey
MATT 2021

🔩 Colour Matched Hardware Available

NOTE The finishes displayed on this page are a guide only and may not be actual representations of the actual finish. For powder coat samples, you can order samples from the colour page on the Vantage or Elevate website. Your local Vantage and Elevate supplier may also have samples by request. For custom powder coat requests, see your local fabricator for more information.

Care & Maintenance

Powder Coated Hardware

Like any other painted surface, powder coated hardware performs at its best when it is properly cared for. Keeping the surface free from pollutants and environmental contaminants will give you the maximum benefit and long-lasting performance from your powder coated surface. This is particularly important in harsh locations such as beachfronts, severe marine environments or areas of high industrial pollution.

Recommended cleaning

Gentle cleaning with a soft brush and mild detergent, followed by a fresh water rinse, will maintain the long-term performance of your powder coated products. In rural or normal urban environments, cleaning should occur every six (6) months.

In particularly harsh locations such as beachfronts, severe marine environments or areas of high industrial pollution, cleaning should occur every three (3) months.

Do not use strong solvents, abrasive cleaning products or any product recommended for thinning paints. If you need to remove splashed paint, sealants or mastics from your powder coated products, use white spirits, carry out cleaning in shade and during cooler temperatures using a soft cloth and gentle wiping only.

We recommend that prior to using any cleaning agent on your hardware, you test a small non-visible area of your powder coated product to ensure that no visual colour change or damage will occur.

Stainless Steel Hardware

Stainless steels are very resistant to rust, however this does not mean that they are immune to it. Stainless steel will rust, and must be kept clean and free from contaminants. Frequent cleaning is a requirement. Stainless steel will develop discolouration, rust spots, and corrosion brought about by environmental and installation conditions.

Environments with exposure to the following substances should be avoided:

- Chlorine based (bleach) products and cleaners.
- Hydrochloric acid (commonly used for tile and concrete cleaning).
- Cement dust.
- Soap concentrates.
- Water with high iron content (i.e. bore water).

Removing tea staining & marks

One of the advantages of stainless steel hardware is that any rust spots can be easily removed and generally the product will return to its “new” state with appropriate cleaning. Most discolouration can be removed with a mildly abrasive cleaner (Ajax, Jif, Brasso etc.). Heavier corrosion and rust can be removed using a Scotch-Brite™ pad or stainless steel scourer. Do not use steel wool, as this will leave residues of steel which will rust. After cleaning, the product should be rinsed free of all cleaning product residue with fresh water.

With proper maintenance, stainless steel will maintain its lustre and appearance indefinitely.

Hardware Warranty

All hardware products supplied by AWS are covered by supplier warranties. The specific details of product warranty vary between ranges. In general, the following warranty considerations apply:

Hardware items are warranted to be free from defects in material and workmanship for a period of six (6) years from the date of purchase.

Various exclusions may apply, including but not limited to:

- Misuse, abuse, accidental or intentional damage, improper or negligent adjustment or operation by the purchaser
- Improper or negligent maintenance or installation
- Inaccurate or incorrect site or operational specifications
- Repair or modification
- Use contrary to the manufacturer's instructions
- Use of replacement parts other than authorised parts
- ‘Tea staining’ on stainless steel
- Corrosion related damage
- Tarnish or wear on soft finishes

Please speak with your fabricator to request a copy of the appropriate product warranty for the hardware items you choose.





Hardware solutions for your windows & doors.

For more information and to find your local Vantage® suppliers:

vantagewindows.com.au

For design inspiration & tips, follow us:

 [vantagewindowsaus](https://www.instagram.com/vantagewindowsaus)  [vantageaustralia](https://www.facebook.com/vantageaustralia)



ABN 48 067 950 903

HEAD OFFICE

76-78 Jedda Road,
Prestons NSW 2170

PO BOX 311
Liverpool NSW 1871

HAVE QUESTIONS?

Call us at 1300 026 189 or email marketing@awsaustralia.com.au

