

ICON™ HARDWARE

icon

Strength & Integrity



Sliding Door Handle

This handle makes a real statement. Its square form offers a firm yet comfortable grip and is ideal for larger sliding door panels in residential and commercial applications.

Manufactured from 316-grade stainless steel, this handle is ideal for use in harsh environmental applications and high traffic areas.

Available in two lengths: 325mm and 630mm.

Suitable for use with:

- 758

High Performance Sliding Door
- 759

ComfortEDGE™ Sliding Door
- 618

MAGNUM™ Sliding Door
- 702

SlideMASTER™ Sliding Door (External Sliding)
- 704

SlideMASTER™ Sliding Door (Internal Sliding)
- 704R


SlideMASTER™ Sliding Door (Recessed)
- 704B

SlideMASTER™ Sliding Door (Bottom Rolling)
- 704T

SlideMASTER™ Sliding Door (Top Hung)
- 731

Thermally Broken Sliding Door
- 852S

Thermally Broken Sliding Door



Height 325mm
Width 60mm
Depth 52mm
Part 93178



Height 630mm
Width 60mm
Depth 52mm
Part 93230

Optional: Thumb Turn. Offers a quick and easy locking solution, providing instant security without compromising safety. Locks from the inside, no need to search for key to unlock, simply rotate.

Part 93539



Hinged Door Lock

A clean and compact hinged door handle available in:

- 2-point lock – single locking
Part 93458
- 4-point lock – multi locking
Part 93470
- lever compression locking

The 4-point lever compression option activates additional locking rods at the top and bottom of the door.


This mechanism allows door panels to seal tightly and securely, increasing airtightness and improving energy efficiency.

The grip has a gently radiused front face and a curved back for a comfortable hand-hold.


The ICON™ Hinged Door Lock is highly durable and tested for use with large residential and commercial hinged door applications.

Suitable for use with:

- | | | | |
|-----|---|-----|--|
| 548 | High Performance Bi-fold Door | 730 | Thermally Broken Bi-fold Door |
| 549 | Hinged Entry Door | 831 | Thermally Broken Bi-fold Door (Top Hung) |
| 50 | Commercial Door (Single Beaded) | 832 | Thermally Broken Bi-fold Door (Bottom Rolling) |
| 51 | Light Commercial Door | 852 | Thermally Broken Hinged Door |
| 52 | Commercial Door (Double Beaded) | | |
| 410 | FoldMASTER™ Bi-fold Door (Bottom Rolling) | | |
| 411 | FoldMASTER™ Bi-fold Door (Top Hung) | | |
| 412 | ViewMASTER™ Bi-fold Door (Bottom Rolling) | | |
| 650 | Architectural Hinged Door | | |
| 729 | Thermally Broken Hinged Door | | |



Height 222mm
Width 30mm
Handle 118mm
Depth 44mm

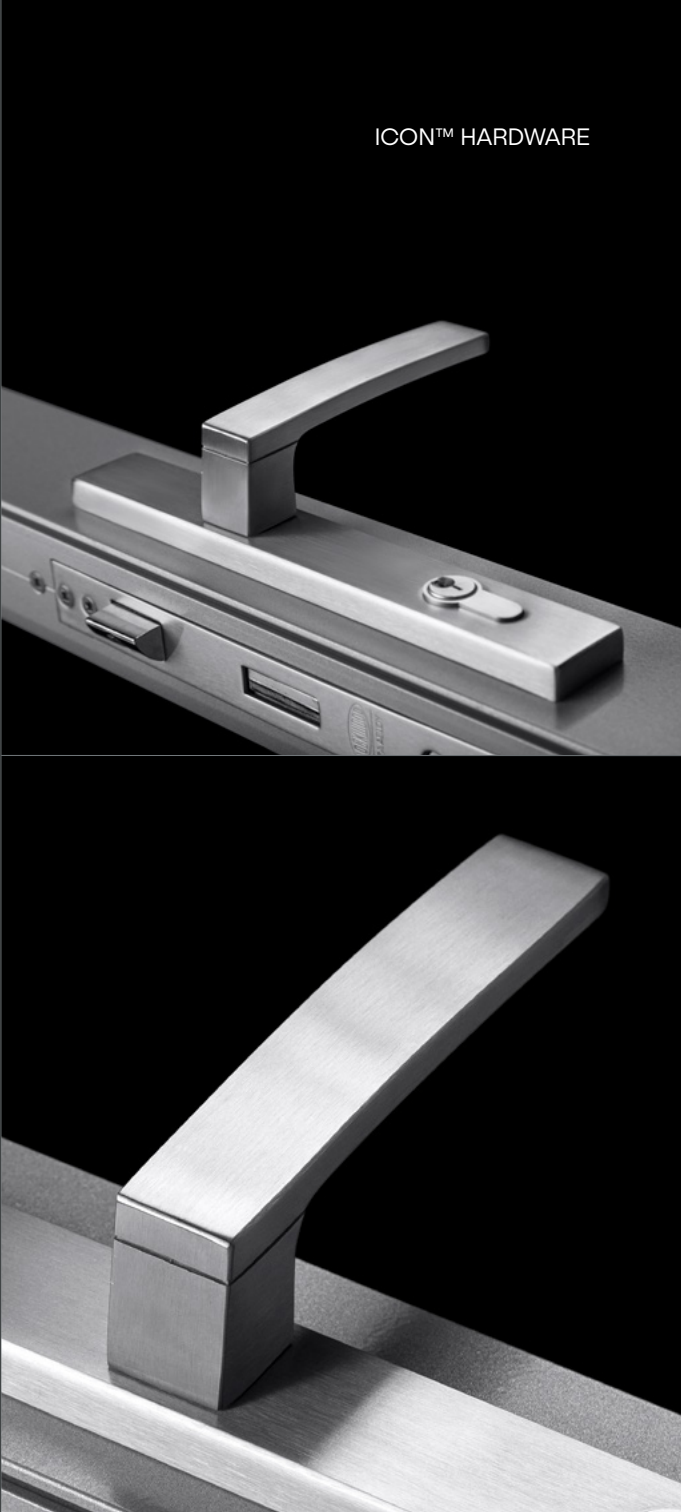


Bi-fold Operator

This swivel operator pushes stainless steel locking bolts into the frame at the top and bottom of the panel. The square corners of the handle are combined with radiused top and bottom surfaces to soften the aesthetics.

Suitable for use with:

- 546 High Performance Bi-fold Window
- 548 High Performance Bi-fold Door
- 410 FoldMASTER™ Bi-fold Door (Bottom Rolling)
- 411 FoldMASTER™ Bi-fold Door (Top Hung)
- 412 ViewMASTER™ Bi-fold Door (Bottom Rolling)
- 730 Thermally Broken Bi-fold Door
- 831 Thermally Broken Bi-fold Door (Top Hung)
- 832 Thermally Broken Bi-fold Door (Bottom Rolling)



Height 170mm
Width 25mm
Depth 16.5mm

Key Lock 93199
Non Keyed 93198





Casement Latch

Designed to suit residential awnings and casement windows, the main features of this latch are its bold square edges and radiused styling.

The 316-grade stainless steel makes it a classy and superior quality selection for use in coastal locations.

Suitable for use with:

- 516 Residential Awning/Casement Window
- 517 Residential Awning/Casement Window
- 616 MAGNUM™ Awning/Casement Window
- 456 Commercial Awning/Casement Window
- 466 Architectural Awning/Casement Window
- 726 Thermally Broken Awning/Casement Window

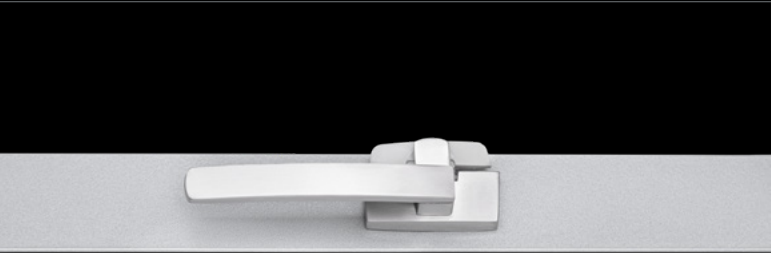

Height	37.2mm		
Width	131mm	RH Part	93147
Depth	31mm	LH Part	93148




Recessed Flush Pull

An ideal choice for a more minimalist finish where understated hardware is preferred. Flush pulls are an excellent choice where consideration is needed around drapes and blinds.

Suitable for use with:

- 758 High Performance Sliding Door
- 759 ComfortEDGE™ Sliding Door
- 618 MAGNUM™ Sliding Door
- 702 SlideMASTER™ Sliding Door (External Sliding)
- 704 SlideMASTER™ Sliding Door (Internal Sliding)
- 704R SlideMASTER™ Sliding Door (Recessed)
- 704B SlideMASTER™ Sliding Door (Bottom Rolling)
- 704T SlideMASTER™ Sliding Door (Top Hung)
- 50S Commercial Sliding Door (Single Beaded)
- 52S Commercial Sliding Door (Double Beaded)
- 731 Thermally Broken Sliding Door
- 852S Thermally Broken Sliding Door



Height 230mm
Width 45mm
Depth 3mm
RH Part 93196
LH Part 93195




Sliding Window Lock

A compact, streamlined window lock for a neat, flush finish. Push operator into body to slide window open or closed. Key lockable for security and peace of mind.

Suitable for use with:

- 752 High Performance Sliding Window
- 601 MAGNUM™ Sliding Window (Beaded Fixed Light)
- 602 MAGNUM™ Sliding Window (Double Sash Design)
- 461 Apartment Sliding Window
- 462 Architectural Sliding Window
- 662 Architectural Sliding Window (150mm)



Height 160mm
Width 24mm
Depth 6.5mm
Part 93274

NOTE: Not suitable for FXXF window configurations.






ISEO Mortice Lock

Designed specifically for high-end sliding doors, the flush face plate ensures seamless stacking with no obstruction or interference.

This key lockable mortice lock and finger pull is an ideal choice for cavity sliding door applications.

Suitable for use with:

- 758 High Performance Sliding Door
- 759 ComfortEDGE™ Sliding Door
- 618 MAGNUM™ Sliding Door
- 704 SlideMASTER™ Sliding Door (Internal Sliding)
- 704R SlideMASTER™ Sliding Door (Recessed)
- 704B SlideMASTER™ Sliding Door (Bottom Rolling)
- 704T SlideMASTER™ Sliding Door (Top Hung)



Height 165mm
Width 32mm
Depth 1.5mm
Part 93209



The conveniently located hidden finger pull allows the panel to be pulled out for operation.

Part 93210

ANDO™

	50/52	442	452	453	456	461	471	642	665	804	831	832	852	824	826
Single Point Sliding Door Lock		●					●	●							
Twin Point Sliding Door Lock		●					●	●							
Slimline Sliding Door Lock		●					●	●							
Sliding Door Handle	●												●		
Hinged Door Lock (2-point)	●										●	●	●		
Hinged Door Lock (4-point)	●										●	●	●		
Lever Compression Lock	●										●	●	●		
Bi-fold Operator											●	●			
Extruded Pull Handle															
Sliding Window Lock						●									
Double Hung Lock				●											
Recessed Finger Pull															
Manual Chainwinder					●				●						
Twin Chainwinder					●				●						

ICON™

Sliding Door Handle	●												●		
Hinged Door Lock (2-point)	●										●	●	●		
Hinged Door Lock (4-point)	●										●	●	●		
Lever Compression Lock	●										●	●	●		
Bi-fold Operator											●	●			
Casement Latch					●										
Recessed Flush Pull													●		
Sliding Window Lock						●									
ISEO Mortice Lock															

MIRO™


D-Pull Sliding Door Handle	●												●		
Single Point Sliding Door Lock		●					●	●							
Hinged Door Lock	●										●	●	●		
Lever Compression Lock	●										●	●	●		
Bi-fold Operator											●	●			
Recessed Flush Pull													●		
Single Chainwinder					●				●						
Twin Chainwinder					●				●						
Sliding Window Lock						●									

Truth™ Winder									●					●	●
Truth™ Casement Winder															
Meeting Stile Mortice Lock															
Flush Pull Handle															
Lift Slide Handle															
Performance Side Latch					●				●		●			●	
Sliding Window Handle Lock															

Colour

ANDO™ hardware is available colour matched to a range of powder coat colours.


Standard Colours




Pearl White
GLOSS 1004




APO Grey
SATIN 1001



Dune®
MATT 1010




Citi
PEARL MATT 4026




Magnolia
GLOSS 2012



Pottery
SATIN 2017



Custom Black
MATT 1002



Monument®
MATT 1011



Woodland Grey®
MATT 1008



Silver Medallist
PEARL SATIN 4028




Stone Beige
MATT 2031




Dark Grey
MATT 2005



Surfmist®
MATT 1013




Primrose
GLOSS 1005




Paperbark®
MATT 1012



Precious Silver Pearl
PEARL SATIN 4030



Hammersley Brown
SATIN 2008



Silver Grey
MATT 2021

🔩 Colour Matched Hardware Available

NOTE The finishes displayed on this page are a guide only and may not be actual representations of the actual finish. For powder coat samples, you can order samples from the colour page on the Vantage or Elevate website. Your local Vantage and Elevate supplier may also have samples by request. For custom powder coat requests, see your local fabricator for more information.

Care & Maintenance

Powder Coated Hardware

Like any other painted surface, powder coated hardware performs at its best when it is properly cared for. Keeping the surface free from pollutants and environmental contaminants will give you the maximum benefit and long-lasting performance from your powder coated surface. This is particularly important in harsh locations such as beachfronts, severe marine environments or areas of high industrial pollution.

Recommended cleaning

Gentle cleaning with a soft brush and mild detergent, followed by a fresh water rinse, will maintain the long-term performance of your powder coated products. In rural or normal urban environments, cleaning should occur every six (6) months.

In particularly harsh locations such as beachfronts, severe marine environments or areas of high industrial pollution, cleaning should occur every three (3) months.

Do not use strong solvents, abrasive cleaning products or any product recommended for thinning paints. If you need to remove splashed paint, sealants or mastics from your powder coated products, use white spirits, carry out cleaning in shade and during cooler temperatures using a soft cloth and gentle wiping only.

We recommend that prior to using any cleaning agent on your hardware, you test a small non-visible area of your powder coated product to ensure that no visual colour change or damage will occur.

Stainless Steel Hardware

Stainless steels are very resistant to rust, however this does not mean that they are immune to it. Stainless steel will rust, and must be kept clean and free from contaminants. Frequent cleaning is a requirement. Stainless steel will develop discolouration, rust spots, and corrosion brought about by environmental and installation conditions.

Environments with exposure to the following substances should be avoided:

- Chlorine based (bleach) products and cleaners.
- Hydrochloric acid (commonly used for tile and concrete cleaning).
- Cement dust.
- Soap concentrates.
- Water with high iron content (i.e. bore water).

Removing tea staining & marks

One of the advantages of stainless steel hardware is that any rust spots can be easily removed and generally the product will return to its “new” state with appropriate cleaning. Most discolouration can be removed with a mildly abrasive cleaner (Ajax, Jif, Brasso etc.). Heavier corrosion and rust can be removed using a Scotch-Brite™ pad or stainless steel scourer. Do not use steel wool, as this will leave residues of steel which will rust. After cleaning, the product should be rinsed free of all cleaning product residue with fresh water.

With proper maintenance, stainless steel will maintain its lustre and appearance indefinitely.

Hardware Warranty

All hardware products supplied by AWS are covered by supplier warranties. The specific details of product warranty vary between ranges. In general, the following warranty considerations apply:

Hardware items are warranted to be free from defects in material and workmanship for a period of six (6) years from the date of purchase.

Various exclusions may apply, including but not limited to:

- Misuse, abuse, accidental or intentional damage, improper or negligent adjustment or operation by the purchaser
- Improper or negligent maintenance or installation
- Inaccurate or incorrect site or operational specifications
- Repair or modification
- Use contrary to the manufacturer's instructions
- Use of replacement parts other than authorised parts
- ‘Tea staining’ on stainless steel
- Corrosion related damage
- Tarnish or wear on soft finishes

Please speak with your fabricator to request a copy of the appropriate product warranty for the hardware items you choose.





Hardware solutions for your windows & doors.

For more information and to find your local Vantage® suppliers:

vantagewindows.com.au

For design inspiration & tips, follow us:

 [vantagewindowsaus](https://www.instagram.com/vantagewindowsaus)

 [vantageaustralia](https://www.facebook.com/vantageaustralia)



ABN 48 067 950 903

HEAD OFFICE

76-78 Jedda Road,
Prestons NSW 2170

PO BOX 311
Liverpool NSW 1871

HAVE QUESTIONS?

Call us at 1300 026 189 or email marketing@awsaustralia.com.au

